

# C5750S-L4



7th generation Core i5 processor  
All aluminum alloy fanless industrial computer

- i5-7360U 2.3GHz dual-core four-thread processor
- 2 \* SODIMM DDR4 2133 MHZ memory, supporting a maximum of 32GB
- Support independent dual display, 1\*HD OUTPUT + 1\*VGA display output
- 6 \* Intel I211AT Gigabit NIC supporting wake up and PXE functions
- 1\* (RJ45) serial interface supports RS232, 1\* COM (DB9) serial interface supports RS485/RS232 switching
- 1\*12PIN Phoenix terminal (including 4-in, 4-out GPIO, switch /5V signal)
- 4\*USB3.0 ports, 2\*USB2.0 ports
- DC12V power input
- fanless cooling structure, all aluminum alloy material

model	C5750S-L4 V1.0(7360U)	
Chassis	Material/Structure	All aluminum alloy fanless
	Color	Iron grey+silver front and rear panels
	Dimension(L*W*H)	174mm*148mm*57mm
	Installation	1.35KG
	install	Desktop/embedded
motherboard	CPU	Integrated 7th generation Kaby Lake-U Intel ® i5-7360U 2.3GHz dual core quad threading processor, TDP 15W
	display	Integrated Intel ® Iris Plus Graphics supports DirectX 12 OpenGL 4.5 and
	Memory	2 *DDR4 SODIMM memory socket, supports 2133MHz memory, and
Front panel interface	POWER	1 * power switch, 1 * restart switch, 1 * AC LOSS
	USB	2* USB2.0 interface
	SIM	1 * SIM card slot, 3G/4G module application
	Phoenix terminal	1 * 12pin (including four in four out GPIO, 1 * power switch signal, 1 * 5V)
rear panel interface	Display interface	1 * VGA interface, 1 * HD OUTPUT 1.4 interface
	LAN	6* Intel I211AT gigabit network card, supporting network wake-up and
	USB	4* USB3.0 interface
	COM	1* (RJ45) serial interface supports RS232, 1 * COM (DB9) serial interface
	audio frequency	1 * Line out interface, 1 * MIC interface
	Power Supply	1 * DC power adapter interface, supporting DC12V power input
storage	SATA	1 * 2.5 inch hard disk
	MSATA	1 * MSATA, transmission speed up to 6Gbps
expand	USB	1 * USB2.0 TYPE A horizontal
	Mini PCIE	1 * Mini PCIE slot, supporting WIFI/4G module
System Support	Microsoft Windows	Windows 7 / 10
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (256 levels, 0-255 seconds)



嵌入式工控机


所有产品规格变更，均不另行通知

power requirements	Power supply type	AC Adapter
	Voltage input	DC 12V
	power output	AC TO DC, 60W and above (depending on the specific equipment)
surroundings	working temperature	-10°C ~ 60°C
	Storage temperature	-20°C ~ 70°C
	relative humidity	5%-95%Relative humidity, non condensing
	Working vibration	0.5g rms/5-500HZ/random/operating



嵌入式工控机

所有产品规格变更，均不另行通知

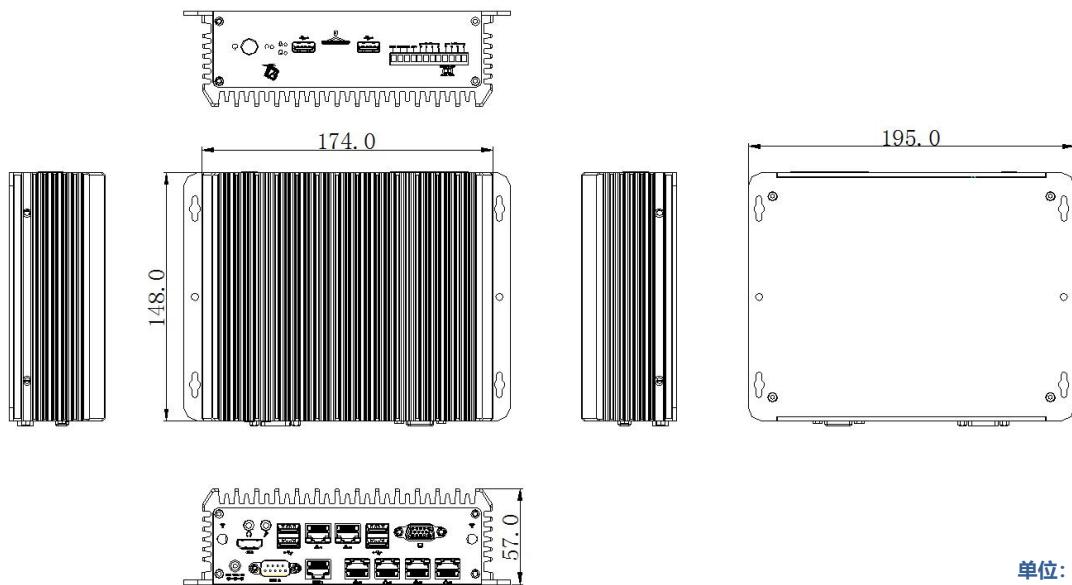

前面板I/O视图



后面板I/O视图



## 订货信息

No.	Model	Processor	MB	IO Board	GPIO	LAN	COM	HD OUTPUT	VGA	USB	built-in USB	power
1	C5750S-L4 V1.0(5020U)	I3-5020U/2.0G	C43_I326D	C57-L4/C68-HM/C68-G12	4 in 4 out	6	2	1	1	6	1	DC 12V
2	C5750S-L4 V1.0(3865U)	3865U/1.80GHz	C57_C326D	C57-L4/C68-HM/C68-G12	4 in 4 out	6	2	1	1	6	1	DC 12V
3	C5750S-L4 V1.0(6650U)	I7-6650U/2.2G	C57_I726D	C57-L4/C68-HM/C68-G12	4 in 4 out	6	2	1	1	6	1	DC 12V
4	C5750S-L4 V1.0(7360U)	I5-7360U/2.3G	C58_I526D	C57-L4/C68-HM/C68-G12	4 in 4 out	6	2	1	1	6	1	DC 12V
5	C5750S-L4 V1.0(8145U)	I3-8145U/2.1GHz	C81-I326D	C57-L4/C68-HM/C68-G12	4 in 4 out	6	2	1	1	6	1	DC 12V
6	C5750S-L4 V1.0(8265U)	I5-8265U/1.6GHz	C81-I526D	C57-L4/C68-HM/C68-G12	4 in 4 out	6	2	1	1	6	1	DC 12V
7	C5750S-L4 V1.0(8565U)	I7-8565U/1.8GHz	C81-I726D	C57-L4/C68-HM/C68-G12	4 in 4 out	6	2	1	1	6	1	DC 12V

Note: Either LAN6 or WIFI can be used with C43 motherboard. The default is LAN6