

C5760S-H2



Features

- Onboard Intel® i5-7360U 2.3GHz dual core 4-thread processor
- 2*DDR4 SODIMM RAM slot, 2133MHz, max up to 32GB
- 2*HD OUTPUT 1.4 port, 1*VGA port
- 2* I211AT Gigabit Ethernet, support WOL / PXE
- 6*COM port (contain 2* RS232 DB9 COM port; 4*RS232/485 phoenix contact, with photoelectric isolation)
- 2*10PIN phoenix contact, 4-in 4-out GPIO, with photoelectric isolation, switch, 5V
- 4*USB3.0 port, 3*USB2.0 port
- 9~36V power input
- Full aluminum case, fanless cooling


Specification

Model No.	C5760S-H2 V1.0(7360U)	
Case	Material/Structure	Full aluminum case, fanless cooling
	Color	Iron gray / Fog Silver
	Dimension(L*W*H)	195mm*148mm*78mm
	Weight (Net)	1.6KG
	Installation	Desktop / Embedded
Motherboard	CPU	Onboard Intel® i5-7360U 2.3GHz dual core 4-thread processor, TDP15W
	Chipset	SOC
	Display	Intel® Iris Plus Graphics 640, support DirectX 12 OpenGL 4.5 / 4K
	RAM	2*DDR4 SODIMM RAM slot, 2133MHz, max up to 32GB
Front I/O Port	POWER	1* Power Switch, 1* Reset Switch, 1* AC LOSS (auto power on switch)
	USB	3* USB2.0 port, 1*USB (built-in)
	SIM	1* SIM slot, 3G/4G module
Rear I/O Port	Display Port	1* VGA port, 2*HD OUTPUT 1.4 port (4096*2304@30Hz)
	LAN	2*Intel® I211AT Gigabit Ethernet, support WOL / PXE
	USB	4* USB3.0 port
	COM	6*COM port (contain 2* RS232 DB9 COM port; 4*RS232/485 phoenix contact, with photoelectric isolation)
	Phoenix contact	2*10pin, support 4*RS232/485 COM port, 4-in 4-out GPIO with photoelectric isolation, switch, 5V
	PS2	1* PS2 port
	Audio	1* Line out port, 1* MIC port
	Power Supply	1* DC power port, 1* 3pin power port, support 9~36V power input
Storage	SATA	1* 2.5" HDD expansion
	SSD	1* MSATA SSD expansion, transfer rate up to 6Gbps
Expansion	Mini PCIE	1* Mini PCIE slot, support WIFI/4G module
	M.2	1* M.2 slot, support M.2 2260/2280 NVME PCIE x4 SSD
OS support	Microsoft Windows	Windows 10/Linux (not include OS code)
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (L256, 0~255 seconds)
Power Supply	Power Type	External power adaptor or open power supply
	Voltage Input	9V~36V
	Power output	60W~180W (depending on the specific equipment)
Environment	Operating Temp.	-10°C ~ 60°C
	Storage Temp.	-20°C ~ 70°C
	Relative Humidity	5%-95% relative humidity, non-condensing
	Working Vibration	0.5g rms/5-500HZ/random/operating



Embedded Industrial Computer

Dimension Drawing

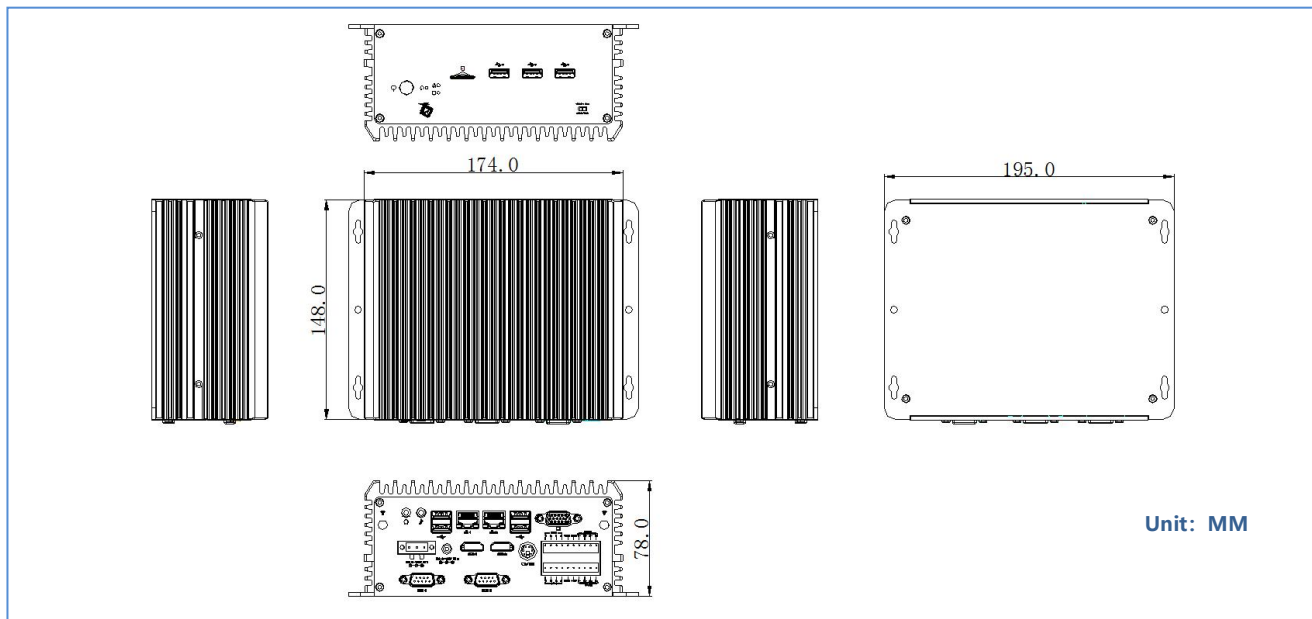

Front Panel I/O View



Rear Panel I/O View



Order Information

No.	Model	Processor	Motherboard	IO Board	M.2	Phoenix contact	LAN	COM	HD OUTPUT	VGA	USB2.0	USB3.0	Built-in USB	SIM	PS2	power-input
1	C5760S-H2 V1.0(J1900)	J1900/2.0G	C19_I926D	C57-H2	/	2*10	2	6	2	1	6	1	1	1	1	9V~36V
2	C5760S-H2 V1.0(3865U)	3865U/1.8G	C57_C326D	C57-H2	1	2*10	2	6	2	1	3	4	1	1	1	9V~36V
3	C5760S-H2 V1.0(5020U)	i3-5020U/2.0G	C43-I326D	C57-H2	/	2*10	2	6	2	1	5	2	/	1	1	9V~36V
4	C5760S-H2 V1.0(6650U)	i7-6650U/2.2G	C58_I726D	C57-H2	1	2*10	2	6	2	1	3	4	1	1	1	9V~36V
5	C5760S-H2 V1.0(7360U)	i5-7360U/2.3G	C58_I526D	C57-H2	1	2*10	2	6	2	1	3	4	1	1	1	9V~36V
6	C5760S-H2 V1.0(8145U)	i3-8145U/2.1G	C81-I326D	C57-H2	1	2*10	2	6	2	1	3	4	1	1	1	9V~36V
7	C5760S-H2 V1.0(8265U)	i5-8265U/1.6G	C81-I526D	C57-H2	1	2*10	2	6	2	1	3	4	1	1	1	9V~36V
8	C5760S-H2 V1.0(8565U)	i7-8565U/1.8G	C81-I726D	C57-H2	1	2*10	2	6	2	1	3	4	1	1	1	9V~36V