

R19SLZ

® Celeron J series processor, 1U
standard firewall pc



Product Features

- Integrated Celeron J1900 quad-core and four-thread processor
- 1* SODIMM memory slot, support single channel 1600/1333MHz DDR3L/1.35V memory, maximum support 8GB
- Support 1xVGA interface display output
- Support 6* Intel WGI211AT Gigabit LAN, support Wake-on-LAN, PXE function
- Support 1*standard RS232 serial interface
- Support 2*USB2.0 interface
- 1U standard chassis, high quality galvanized steel


model	R19SLZ	
Chassis	Material/Structure	1U standard chassis, high quality galvanized steel
	color	Asian silver black
	Size (length, width and height)	430mm*281mm*45mm
	Install	1U standard rack
motherboard	CPU	Integrated Intel® Celeron® J1900 2.0GHz quad-core processor, TDP10W
	system chip	Based on Intel® Bay trail SOC platform
	Display	Integrated Intel® HD Graphics Core Graphics
	Memory	1* SODIMM memory slot, support single channel 1600/1333MHz DDR3L/1.35V
Front panel interface	POWER	1*Power switch, 1*Reset switch
	USB	2* USB2.0 interface
	COM	1* standard RS232 serial interface
	LAN	6* Intel WGI211AT Gigabit LAN, support Wake-on-LAN, PXE function,
	led	1* power indicator, 1* hard disk indicator
rear panel interface	display interface	1*VGA interface
	power supply	1*AC power input interface
storage	SATA	1* SATA2.0 2.5-inch notebook hard drive bay, you can directly install the hard drive
	SSD	1* MSATA SSD solid state drive expansion, SSD transfer speed up to 3Gbps
expand	Mini PCIE	2* Mini PCIE slot, support WIFI/3G/4G module
software support	Microsoft Windows	Windows 7/10, 64bit (without key)
	Linux	Ubuntu
	Watch Dog	Support hardware reset function (256 levels, 0~255 seconds)
power requirements	Power Type	External open power supply
	Voltage input	AC 110~220V
	power output	AC TO DC, 60W
surroundings	Operating temperature	-10℃~60℃




软路由准系统

storage temperature	-20°C~70°C
Relative humidity	5%-95% relative humidity, no condensation
work vibration	0.5g rms/5-500HZ/random/operating


尺寸图

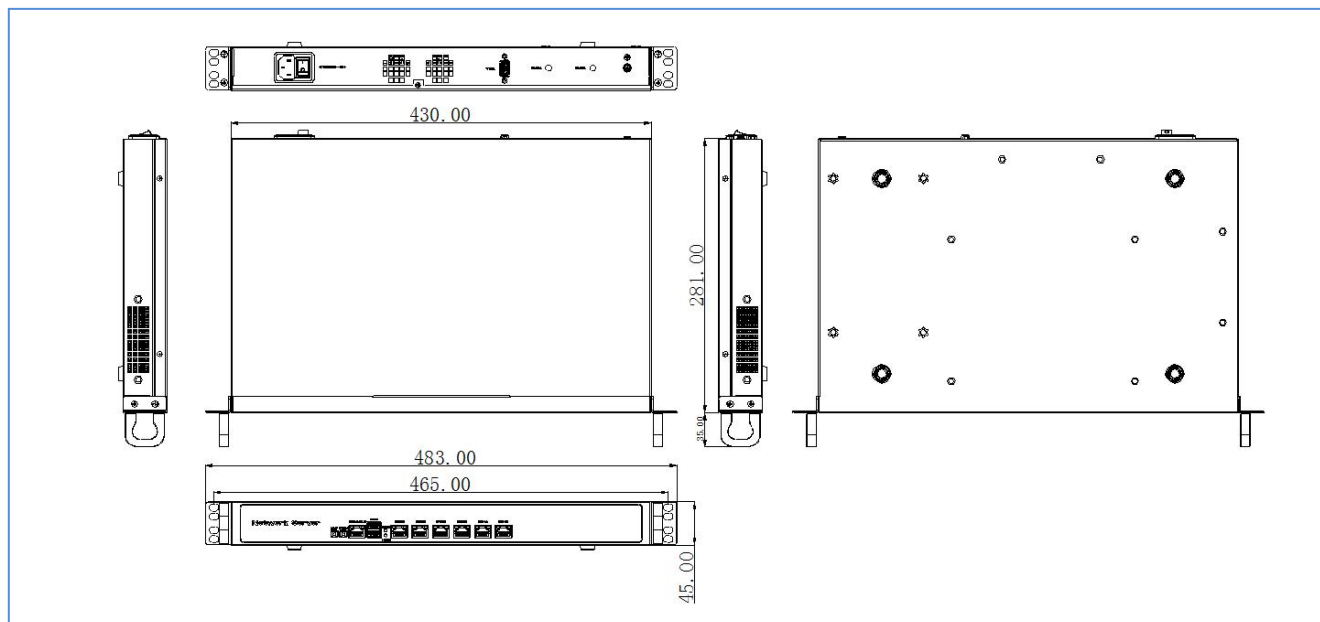

前面板外置I/O视图

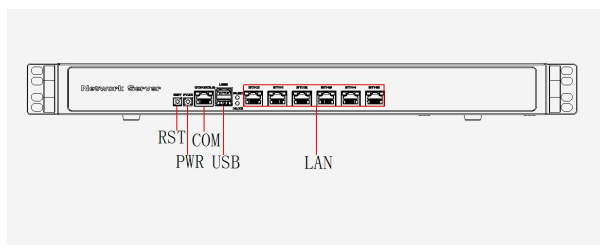

后面板外置I/O视图

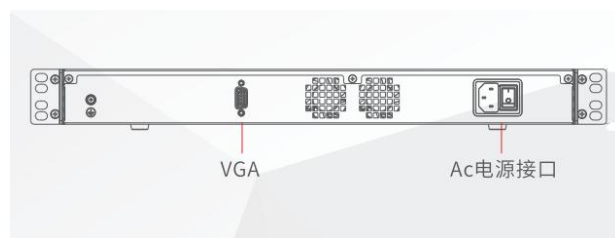

订货信息

No.	Model	Processor	Motherboard	Memory	LAN	COM	VGA	USB2.0	power-input
1	R19SLZ	J1900/2.0GHz	D19SL	1* DDR3	6*WG1211AT	1	1	2	AC convert DC
2	R41SLZ	J4125/2.0GHz	D41SL	1*DDR4	6*225V	1	1	2	AC convert DC

包装清单

序号	料号	描述	数量	单位	备注
1	03.01.DC0-D125A-02	AC to DC_12V/5A Open Type Power Supply K0J-060F SPEC REV.A Qiaowei	1	pcs	标配
2	03.03.J01-0H015-00	National standard power cord _L=1.5m product suffix	1	pcs	标配