


ITX-FT20_2L VER:1.1 规格表



ITX-FT20 VER:1.1 主板正面图



ITX-FT20 VER:1.1 主板 I/O 图

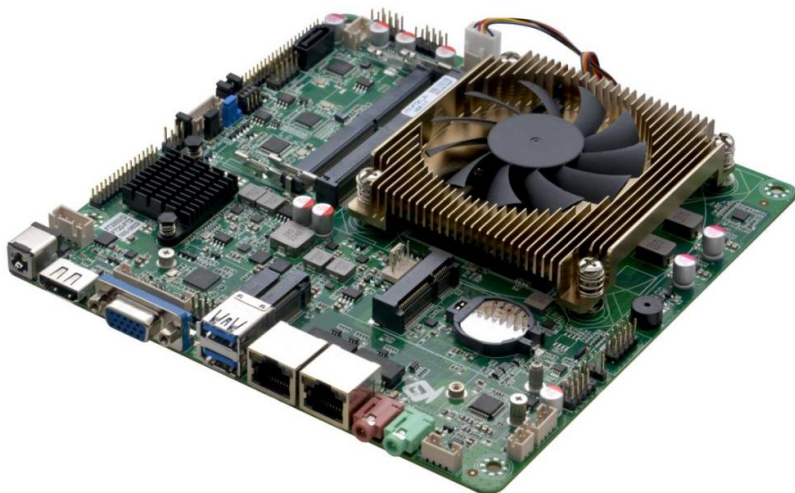

ITX-FT20 VER:1.1 主板侧面图

Product model	ITX-FT20_2L VER:1.1(FT2000)
processor	Integrated Feiteng FT-2000/4 2.2GHz quad-core processor, TDP 30W
chipset	SOC
Internal memory	2* SODIMM slots for dual-channel DDR4 memory of 2666 MHZ and up to 32GB
display	1* SM768 256M GPU
network	1* VGA,1* HD OUTPUT,1* LVDS, support dual-channel 24BIT
deposit	2* RTL8211F Gigabit NIC chip, supports network wake up /PXE function
	1* SATA3.0 hard disk interface, transmission speed up to 6Gbps
	1* MSATA slot, support SSD, transfer rate up to 6Gbps
Tone frequency	1* M.2 slot, supporting the M.2 2280/2260 PCIE SSD
Expansion slot	Onboard USB HS-100B sound card chip, support MIC/Line-out, power amplifier
I/O ports on the backplane	The amplifier supports 2 Ω /3W dual channels
	1* M.2 slot, supporting the M.2 2230 WIFI module
	2* USB3.0 interface,
	1* HD OUTPUT port
	1 x VGA port
	2* RJ45 Gigabit network interface
	1* Line-out(green),1*MIC(red)
	1* DC12V power input port
Built-in I/O interface	1* LVDS interface, 2*15pin, support dual channel 24BIT
	1* JVGA port 1*12pin, same signal as DB15
	1* screen backlight power supply interface 1*6pin
	5* RS232 serial port, COM2/3 supports RS485 function
	1* CAN interface 1*2pin

	6* USB2.0 interface 2*5pin
	1* power amplifier interface 1*4pin
	1* hard disk power supply voltage port 1*4pin
	1* Front panel function button and indicator port 2*5 pin
	1* CPLD burning interface 2*5pin
	1* DC power interface.1*4pin, support 12V power input and output
Fan interface	1*4pin CPU intelligent fan interface; 1*4pin system intelligent fan interface
BIOS	128Mb Flash ROM
GPIO	NA
Support system	UOS, Galactic Unicorn
Guard dog	The FT-2000/4 integrates two WDTS
Power supply type	Support DC12V power supply
Operating temperature	-10℃ to 60℃
Storage temperature	-20℃ to 70℃
Working humidity	5%-95% relative humidity, no condensation
dimension	170mm x 170mm

订购信息:

No.	Model	Processor	Frequency	Memory	VGA	HD OUTP UT	EDP	LVDS	LAN	USB	COM	485	Power
1	ITX-FT20_2L VER:1.1(FT2000)	FT-2000/4	2.2GHz	2*SODDR4	1	1	/	2ch*24bit	2*RTL8211F	8	5	2	DC12V
1	ITX-FT20_2L VER:1.1(D2000)	D2000	2.3GHz	2*SODDR4	1	1	/	2ch*24bit	2*RTL8211F	8	5	2	DC12V

