



EPIC-E19_J126L VER:1.1

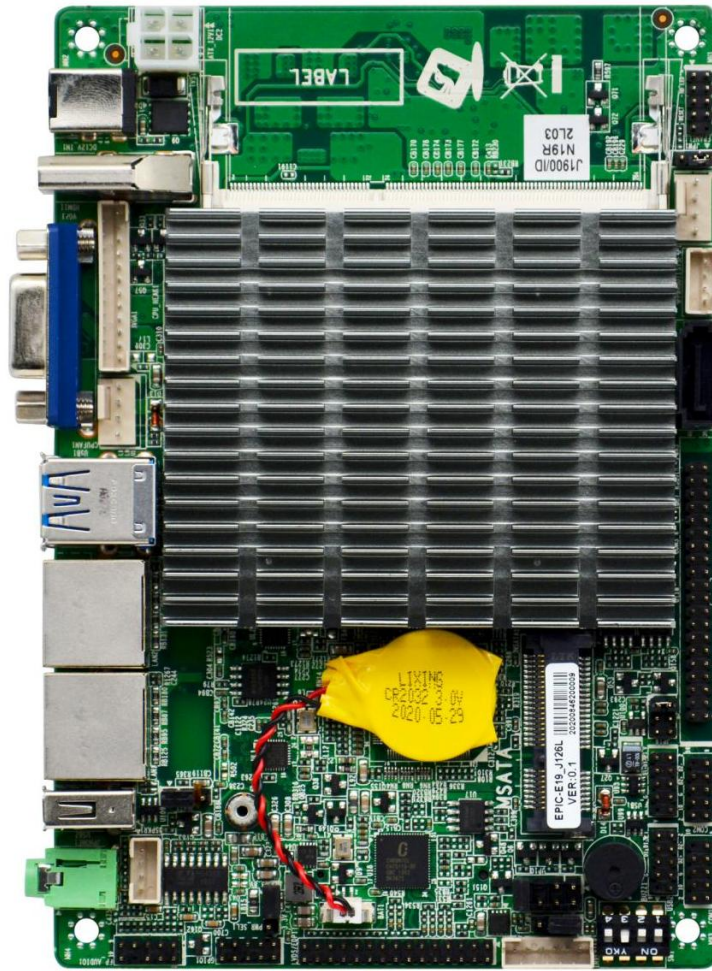

EPIC-E19_J126L VER:1.1 front view



EPIC-E19_J126L VER:1.1 IO view



EPIC-E19_J126L VER:1.1 side view

Product number	EPIC-E19_J126L VER:1.1
Processor	Integrated Intel®J1900/2.0GHz quad-core processor, TDP power consumption 10W
Chipset	Based on Intel® BayTrail platform
RAM	1* SODIMM memory slot, support single channel 1600/1333MHz DDR3L/1.35V memory, maximum support 8GB
Display	Integrated Intel®HD Graphics core graphics card 1* VGA, 1*HDMI interface, 1* LVDS interface
Internet	2* RTL8111H Gigabit network card, support Wake on LAN, PXE function
Store	1* 7pin SATA2.0 hard disk interface, transfer rate up to 3Gbps 1* MSATA slot, SSD solid state drive supporting Intel protocol, transmission rate up to 3Gbps
Audio	Onboard ALC662 6-channel high-fidelity audio controller, support MIC/Line-out. The power amplifier is recommended to use 2Ω5W speakers
Expansion slot	1* Mini-PCIE slot, support WIF/4G module
Backplane I/O interface	1* DC 12V power input interface 1* VGA display interface 1* HDMI display interface 2* USB3.0 interface, 1* USB2.0 interface 2* RJ45 Gigabit network interface 1* Line-out (green)
Built-in I/O interface	1* 4pin ATX power connector, support 12V power input and output 1* JVGA interface 1*12pin, the same signal as DB15 1* LVDS interface, 2*15pin, support dual channel 24BIT 1* Screen backlight power supply interface 1*6pin 4* USB2.0 interface, 2*5pin 6* RS232 serial interface, COM1 supports the 9th pin charged function, COM2/COM3 supports RS485 function, 1*HDD power supply interface 1*4pin 1 Front audio interface 2*5pin 1* power amplifier interface 1*4pin 1* SIM card slot 1* Front panel function button and indicator port 2*5pin
Fan interface	Fanless cooling, reserved 1*4pin CPU intelligent fan interface, 1*4pin system fan interface
GPIO	Support 4 input and output GPIO
BIOS	64Mb Flash ROM
Watchdog	Support hardware reset function (256 levels, 0~255 seconds)
operating system	Windows 10/Linux
Power type	Powered by DC 12V power supply
Operating temperature	-10℃~60℃
Storage temperature	-20℃~70℃
Working humidity	5%-95% relative humidity, non-condensing
Size	148mm x 102mm

Ordering Information:

No	Model	Processor	Frequency	Memory	VGA	HDMI	LVDS	EDP	LAN	USB	COM	RS485/422	Power
1	EPIC-E19_J126L VER:1.1	J1900	2.0G	1* SODDDR3L	1	1	2ch*24BIT /		2*8111H	7	6	COM2	DC12V