

R570H-E1



Product characteristics

- 1*HDMI, 1*VGA
- 6*RS232 DB9 serial ports, 2 of which support RS232/485/422
- 8*USB, 1*PS/2
- Supports 1*PCIE X16 expansion
- 1U standard chassis, aluminum alloy panel, high quality galvanized steel plate
- Built-in small 1U FLEflex power supply

Model number	R570H-E1 V1.0	
chassis	Material/Structure	1U standard chassis, aluminum alloy panel, high quality galvanized steel plate
	colour	Argentous black
	Dimensions (length, width and height)	430 MM * 320 MM * 44.5 MM
	Weight (bare weight)	4.5 KG
	Install	1U standard rack
Front panel interface	POWER	1* Power switch, 1* reset switch
	LED	1* hard disk indicator, 1* power indicator
	USB	2 * USB2.0
Rear panel interface	Display interface	1*VGA, 1*HDMI
	COM	2*RS232/485/422 DB9 serial port, can be expanded 4*RS232 DB9 serial port (optional)
	LAN	2*RJ45
	USB	6*USB(USB3.0/2.0 quantity based on motherboard)
	PS/2	1*PS/2
store	SATA	Supports 1 x 3.5-inch hard disks or 1 x 2.5-inch hard disks
extend	PCIE	1*PCIE X16
Power source	Power supply type	Built-in small 1U FLEflex power supply
	Voltage input	AC 110-220V
environment	Operating temperature	-10℃ to 50℃




1U工控系统

所有产品规格变更，均不另行通知

Storage temperature	-20℃ to 70℃
Relative humidity	5%-95% relative humidity, no condensation
Working vibration	0.5g rms/5-500HZ/random/operating

R570H-E1

尺寸图

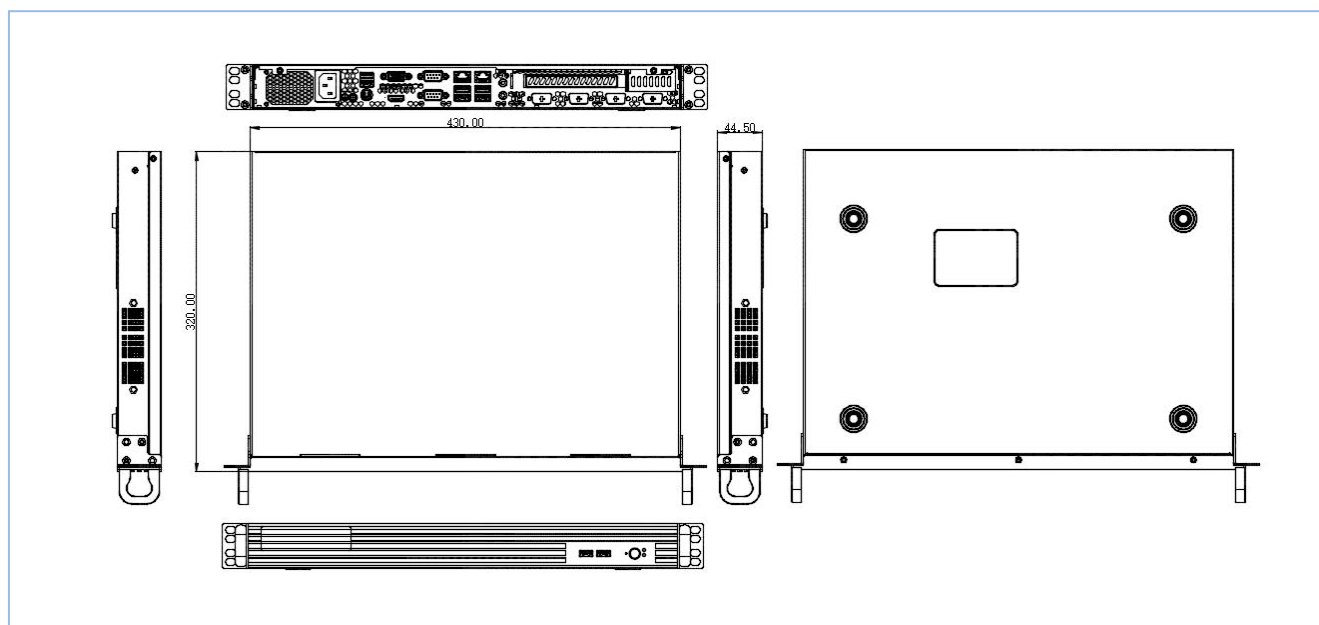

前面板I/O视图



后面板I/O视图

订货信息

No.	Model	Processor	Memory	Motherboard	IO Board	PCIE	LAN	VGA	HDMI	USB2.0	USB3.0	COM	power
1	R570H-E1 V1.0(B75M1)	LGA1155	1*DDR3	B75M1	H610M1-E1/IPC505-SW	X16	2*I210	1	1	4	4	6	AC 220V
2	R570H-E1 V1.0(B75R1)	LGA1155	1*DDR3	B75R1	H610M1-E1/IPC505-SW	X16	2*8111H	1	1	4	4	6	AC 220V
3	R570H-E1 V1.0(Q85M1)	LGA1150	1*DDR3	Q85R1	H610M1-E1/IPC505-SW	X16	2*I210	1	1	6	2	6	AC 220V
4	R570H-E1 V1.0(H81R1)	LGA1150	1*DDR3	H81R1	H610M1-E1/IPC505-SW	X16	2*8111H	1	1	6	2	6	AC 220V
5	R570H-E1 V1.0(Q250M1)	LGA1151	2*DDR4	Q250M1	H610M1-E1/IPC505-SW	X16	2*I210	1	1	4	4	6	AC 220V



研域
YENTEK

1U工控系统

所有产品规格变更，均不另行通知

6	R570H-E1 V1.0(H510M1)	LGA1200	2*SODDDR4	H510M1	H610M1-E1/IPC505-SW	X16	2*I226	1	1	4	4	6	AC 220V
7	R570H-E1 V1.0(H510R1)	LGA1200	2*SODDDR4	H510R1	H610M1-E1/IPC505-SW	X16	2*8111H	1	1	4	4	6	AC 220V
8	R570H-E1 V1.0(H610M1)	LGA1700	2*SODDDR4	H610M1	H610M1-E1/IPC505-SW	X16	2*I226	1	1	4	4	6	AC 220V

配件清单

序号	料号	描述	数量	单位	备注
1	03.02.N05-57ELR-00	挂具, L26*W44.5*W32mm	1	Set	标配
2	03.03.J01-0H015-001	国标电源线_L=1.5m 品字尾	1	pcs	标配
3	03.01.DC0-0250W-01	小1U Flex 250W,品字尾	1	pcs	标配
4	03.01.DC0-A350W-00	小1U Flex 350W,品字尾	1	pcs	可选
5	02.01.E32-1155U-01	LGA115X,1U 涡轮铜风扇	1	pcs	可选
6	02.01.E32-LGA7U-00	LGA1700, 1U 涡轮铜风扇	1	pcs	可选
7	03.03.K13-22050-50	COM 转接线 2.00mm 1分4 L=50cm	1	pcs	可选